



MARBLE LOOK

FLOOR | WALL

FAMED™ + MICROBAN®

PROTECTION THAT LIVES ON



COLORBODY™ PORCELAIN FLOOR & CHEVRON MOSAIC
AND GLAZED CERAMIC PENNY ROUND MOSAIC with MICROBAN® TECHNOLOGY

 **dalTile**®
IMAGINE WHAT'S POSSIBLE™

FLOOR | WALL

FAMED™ + **MICROBAN®**

PROTECTION THAT LIVES ON

COLORBODY™ PORCELAIN FLOOR & CHEVRON MOSAIC
AND GLAZED CERAMIC PENNY ROUND MOSAIC with MICROBAN® TECHNOLOGY

Marble Of The World

Prominent in charm and remarkable durability – Famed™ features proprietary Microban® Technology offering a life time of built in antimicrobial product protection that does not wash off or wear away. Designed to promote cleaner spaces empowered with Microban® antimicrobial product protection for your floor, wall and mosaic tile. Brimming with celebrated designs – striking colors ranging from bold & dramatic to subtle & neutral overtones, these five stunning looks should surely make the top of your design bucket list.

- A LIFETIME OF CLEANLINESS

- With Microban® you can Worry Less and Live More with time to do more of what you enjoy in life
- Powerful 24/7 antimicrobial product protection technology that is always working
- Built-in antimicrobial protection to protect the product that will not wash off or wear away
- Guards product against bacterial odors and degradation from microbial causes

- INSPIRE BREATHTAKING DESIGN

- Floor tile offered in 12 x 24 or 24 x 24
- Chevron and Penny Round mosaic options also available

MARBLE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



P.C.



LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES

Cover photo features Famed™ Glamour 12 x 24 matte on the floor and Natural Marble Imperium on the countertop and backsplash. Above photo features Famed™ Iconic 12 x 24 matte on the floor and Iconic chevron mosaic polished on the wall.

MARBLE LOOK

FLOOR | WALL

FAMED™ + MICROBAN®

COLORBODY™ PORCELAIN FLOOR & CHEVRON MOSAIC
AND GLAZED CERAMIC PENNY ROUND MOSAIC with MICROBAN® TECHNOLOGY

SIZES:



24 x 24
Floor Tile



12 x 24
Floor Tile



3 x 6
Chevron
Mosaic



3/4 x 3/4
Penny Round
Mosaic

FINISHES: MATTE | POLISHED

COLOR PALETTE



DIAMOND



ICONIC



FORTUNE



GLAMOUR




LUXE

COLORBODY™ PORCELAIN FLOOR



DIAMOND FM10

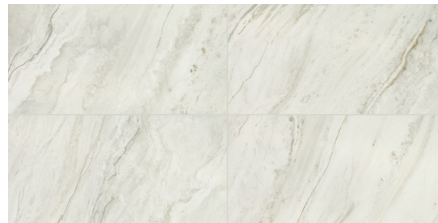

ICONIC FM11



FORTUNE FM14



GLAMOUR FM13



LUXE FM12

POLISHED COLORBODY™ PORCELAIN CHEVRON MOSAIC



DIAMOND FM10



ICONIC FM11



FORTUNE FM14




GLAMOUR FM13



LUXE FM12


GLAZED CERAMIC PENNY ROUND MOSAIC




DIAMOND FM10



ICONIC FM11



FORTUNE FM14



GLAMOUR FM13



LUXE FM12



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT™
*Applicable to products with Matte and
Textured Finishes



FIRE-RESISTANT™
*Not Applicable to Heat-Treated
Mosaics







CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 24 Floor Tile	(23-7/16" x 23-7/16") (59.44 cm x 59.44 cm)	5/16"	15.20	4
	12 x 24 Floor Tile	(11-5/8" x 23-7/16") (29.56 cm x 59.44 cm)	5/16"	17.01	9
	3 x 6 Chevron Mosaic (Mesh-Mounted)	(10-5/8" x 12-1/8" Sheet) (26.99 cm x 30.80 cm Sheet)	5/16"	7.50	10
	3/4 x 3/4 Penny Round Mosaic (Dot-Mounted)	(13-3/8" x 11-3/8" Sheet) (33.97 cm x 28.89 cm Sheet)	1/4"	10.60	10

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓***

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Floor tile and chevron mosaic suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Penny round mosaic tile suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* Matte tile only

** Penny Round mosaic tile only


*** Mosaic tile only



ZEROTOX
Healthy Homes | Healthy Planet



TRIM

Type	Number	Size	Pieces/ Carton
 Floor Bullnose	P-43F9	3 x 24	10

INSTALLATION

Grout Joint Recommendation

Shade Variation

Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)



Mosaic: 1/8"

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Tile & Chevron Mosaic Result	Penny Round Ceramic Mosaic Result
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0 (Matte) 6.0 (Polished)	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com.

daltile®
IMAGINE WHAT'S POSSIBLE™
©2020 Daltile (8/20)